

M25x 1.5


Stroke 25mm

200%

ZIMMER INDUSTRIAL-SHOCK ABSORBER
UP TO **2,0** -TIMES OF ENERGY ABSORPTION



Available as MOA25
and EmergencyStop I-Class
(see page 9)

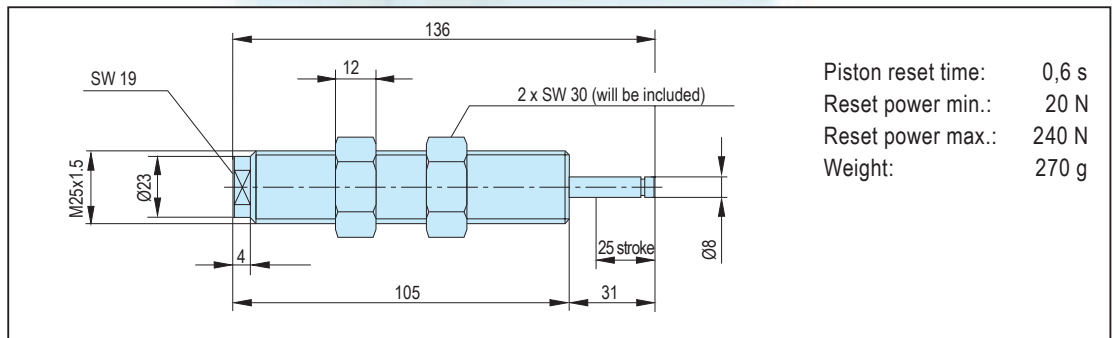

Power Stop

NEW

construction size/ order number	energy absorption/ per stroke Nm	energy absorption/ per hour Nm/h	stroke mm	impact speed		actual mass*	
				min m/s	max m/s	max kg	min kg
M25x1.5W	100	45.000	25	1,4	4,0	102	12,5
M25x1.5S	210	95.000	25	1,4	4,0	214	26
M25x1.5M	210	95.000	25	0,6	1,8	1167	130
M25x1.5H	210	95.000	25	0,2	0,8	10500	656

Emergency - Stop

construction size/ order number	energy absorption/ per stroke Nm	energy absorption/ per hour Nm/h	stroke mm	impact speed		actual mass*	
				min m/s	max m/s	max kg	min kg
M25x1.5SN	550	-	25	1,4	4,0	561	69
M25x1.5MN	550	-	25	0,6	1,8	3056	340
M25x1.5HN	550	-	25	0,2	0,8	27500	1719

*Actual mass as comparative value to conventional industrial shock absorber

Accessories

