


M33x 1.5L

Stroke 50mm

300%

ZIMMER INDUSTRIAL-SHOCK ABSORBER
WITH **3,0**-TIMES OF ENERGY ABSORPTION

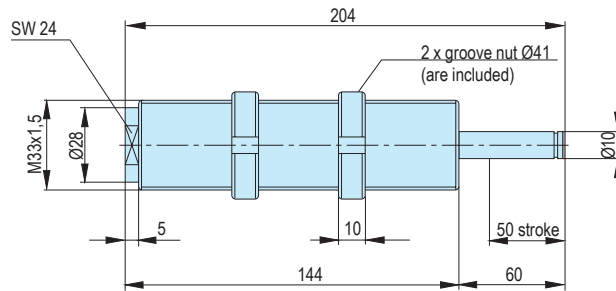

Piston reset time: 1,2 s
Reset power min.: 40 N
Reset power max.: 80 N
Weight: 800 g

Power Stop

construction size/ order number	energy absorption/ per stroke Nm	energy absorption/ per hour Nm/h	stroke mm	impact speed		actual mass*	
				min m/s	max m/s	max kg	min kg
M33x1.5LS	450	170.000	50	2,0	4,0	225	56
M33x1.5LM	450	170.000	50	0,6	2,5	2500	144

Emergency Stop

construction size/ order number	energy absorption/ per stroke Nm	energy absorption/ per hour Nm/h	stroke mm	impact speed		actual mass*	
				min m/s	max m/s	max kg	min kg
M33x1.5LSN	1125	-	50	2,0	4,0	563	140
M33x1.5LMN	1125	-	50	0,6	2,5	6250	360

*Actual mass as comparative value to conventional industrial shock absorber

Accessories

cooler nut (Aluminium)
on request

order number: MAH33x1.5
arresting sleeve
stainless steel

order number:
MKK33/MKS33
head
plastic/steel

order number: MRA33x1.5L
lock air adapter/
bolt pre-supporting

